

CRYSTORAMA

1958

95 Cantiague Rock Road, Westbury NY 11590


Ph: 516.931.9090 fax: 516.931.1254

info@crystorama.com www.crystorama.com


MODEL#: 8105-PN

ASSEMBLY AND DRESSING INSTRUCTIONS

For Hanging

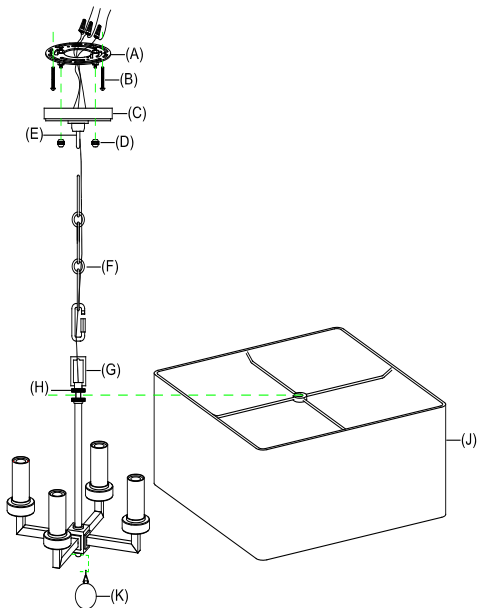

For Ceiling

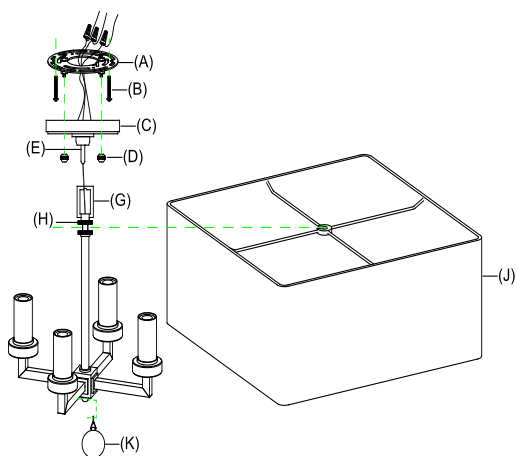


PARTS INCLUDED

- | | |
|---------------------|---------------------|
| (A) Mounting plate | (H) Threaded ring |
| (B) Mounting screws | (J) Shade |
| (C) Fixture base | (K) Crystal drop 2" |
| (D) Cap nuts | |
| (E) Mounting loop | |
| (F) Chain | |
| (G) Top loop | |



All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



WARNINGS:

Turn off power (unplug from the wall outlet) before replacing the bulb(s), making sure the bulb(s) had sufficient time to cool down. DO NOT subject the lamp to any shock while lit as shattering of lamp may result.

TO ASSEMBLE:

- Carefully remove all parts from the box and remove all plastic covering.
- Turn off power to the junction box where the pendant will be installed.

For Hanging:

- Hook the chain (F) to top loop (G).
- Feed wire through chain (F) and mounting loop (E).
- Remove mounting plate (A) from fixture base (C) by unscrewing cap nuts (D)
- Attach mounting plate (A) to ceiling outlet box and secure with mounting screws (B) provided.
- Attach chain (F) with light fixture to mounting loop (E) at desired height.
- Attach the fixture ground wire to the ground wire from the outlet box (usually green or bare wire) with a plastic wire connector and wrap the connection with electrical tape.
- Connect the hot wire (smooth wire) to the hot outlet box wire (usually black) with a plastic wire connector and wrap the connection with electrical tape.
- Connect the neutral wire (ridges molded wire) to the neutral outlet wire (usually white) with a plastic wire connector and wrap the connection with electrical tape.
- Tuck these wire connections neatly into the ceiling outlet box.
- Attach fixture base (C) to affixed mounting plate (A), letting the rod on mounting plate (A) pass through the holes on fixture base (C) and secure with cap nuts (D).
- Attach side opening of shade spider (J) to threaded section and secure with threaded ring (H)
- Hook the crystal drop (K) to the bottom of light fixture.
- Insert the recommended 60-watt Type B bulbs (not included) into the threaded sockets.
- Restore power to the junction box and test the pendant fixture.
- Assembly is complete.

For Ceiling:

- Remove chain (F), attach top loop (G) to mounting loop (E).
- Feed wire through mounting loop (E).
- Follow steps 4-5 of "For Hanging" assembly.
- Follow steps 7-16 of "For Hanging" assembly.

CARE INSTRUCTIONS:

To clean, use a soft cloth only. DO NOT use any chemical or abrasive cleaners.