

**Hot Water Booster and Baffle
Models LK246 and LK498**




SPECIFICATIONS

GENERAL

LK246 6,000 watts electric sanitizer/hot water booster (Glenn Electric HTT-60) adjustable 60°F to 215°F with manual reset over-temperature cut-out. Type 321 stainless steel heating element. Height is 32" (813mm) with element and control box. Operates on 208 or 240 volt single phase, 60 cycle. UL listed. Use of a GFI (ground fault interrupter) is recommended. 30" (762mm) electrical cord and stainless steel mounting bracket are included. Available for catalog and custom scullery sinks. Requires 18" (457mm) minimum compartment length. Caution: 1) For use only submersed in water. 2) Do not run heater unattended. Ship. Wt. 13 lbs.

LK498 Stainless steel perforated baffle for the LK246 protects the electrodes from possible damage. 16-11/16" (424mm) long x 5" (127mm) high. Ship. Wt. 1 lb.

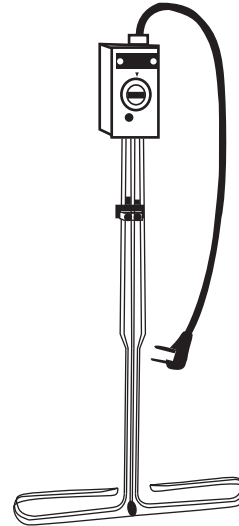

Model LK246

