


**CELANO V2™**

# FP8062B\*\* 52" Ceiling Fan

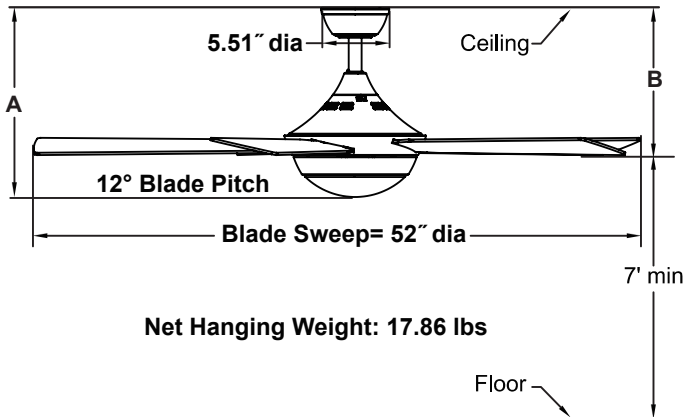

	A	B
Fan w/4.5" downrod	14.71"	11.10"
Fan w/12" downrod	22.21"	18.60"
Fan w/18" downrod	28.21"	24.60"
Fan w/24" downrod	34.21"	30.60"
Fan w/36" downrod	46.21"	42.60"
Fan w/48" downrod	58.21"	54.60"
Fan w/60" downrod	70.21"	66.60"
Fan w/72" downrod	82.21"	78.60"

Available Finish	
BN	Brushed Nickel with reversible Cherry/Dark Walnut Blade and Opal Frosted glass
DZ	Dark Bronze with reversible Cherry/Dark Walnut Blade and Opal Frosted glass
MW	Matte White with Matte White Blade and Opal Frosted glass

### INSTALLATION REQUIREMENTS:

Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

### ELECTRICAL REQUIREMENTS:

Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

### MOTOR SPECS:

172 x 17 AC motor is designed for optimal performance with this fan.

### BLADES:

A set of five 22.5" plywood blades is included.

### LIGHTING OPTIONS:

One 18-watt dimmable LED included.

### CONTROL OPTIONS:

TR500 hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels, fan/light timer and off button. The reverse switch is located on the top housing. Optional CWRL4, WC2WH and WR501WH wall controls, BTCR9 and CRL4WH hand held remote controls and BTR9 and WFR50 WiFi receiver are available—sold separately. Instructions are provided with each control.

### DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-45). Optional downrods available in 12", 18", 24", 36", 48", 60" and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling ball kits (SCK1-52) are available for slope angles greater than 19° and up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

### LOCATION USE:

Fan is rated for dry location only.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	171	5192	88	0.49	59
Med	113	3226	124	0.34	26
Low	58	1532	164	0.20	9

Light Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1400	3000	90%

Energy Guide FTC			
Power (W <sub>ave</sub> )	Total Air Delivery (CFM <sub>ave</sub> )	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
38	3402	11	90