


R&D
2019.10.20
DengMark

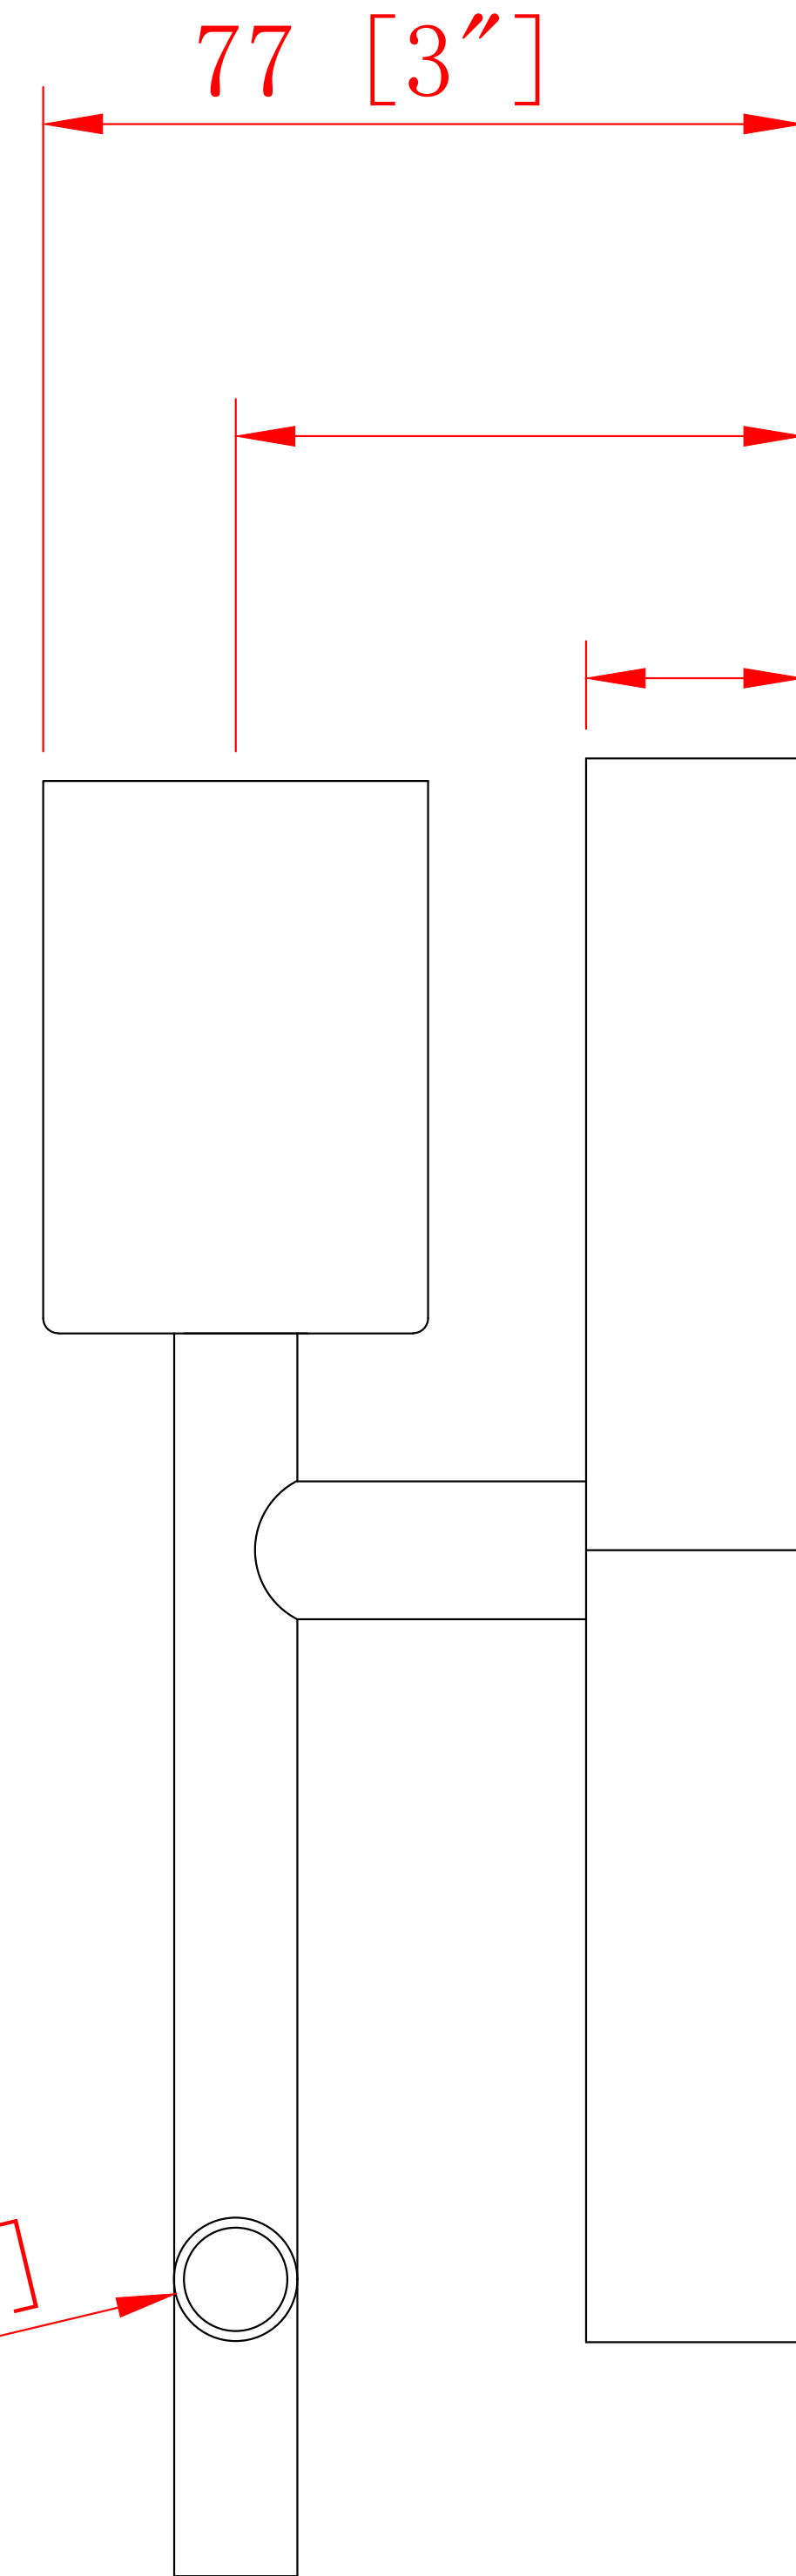

∅12.5 [∅1/2"]

Backplate SQ115mm [4.5"]

425-1W

UL SPECIFICATION

- * FIXTURE SHALL BE LISTED FOR LOCATION ONLY AND LABELED AS SUCH.
- * FIXTURE MUST BE MANUFACTURED IN ACCORDANCE WITH UL STANDARD 1598.

PARTS SPECIFICATIONS
ITEM QTY DESCRIPTION

A (1) SOCKET- UL LISTED/CSA CERTIFIED
BASE=MEDIUM
SOCKET=PORCELIN
SEE LEAD WIRE FOR SOCKET WIRE SPEC.

(1) LEAD WIRE- 7" [180] FROM CANOPY
UL LISTED/CSA CERTIFIED, AWG #18
105°C BLACK AND WHITE WIRE.
STRIP 1/2 [12.7], SPLIT 3 [76.2].
FROM TOP OF SCROLL.
(SEE CHART FOR COLOR).

GROUND WIRE- 7" [180] FROM CANOPY
1/4 LAY COPPER GROUND WIRE.
FROM TOP OF SCROLL.
(SEE CHART FOR TINT).

NO.	PART NO.	DESCRIPTION	REQ.

NOTICE: ANY DESIGN OR OTHER INFORMATION HEREON DEVELOPED BY THIS COMPANY IS CONFIDENTIAL MATERIAL AND EXCLUSIVE PROPERTY OF THE L.D. ALFA CO. DISCLOSURE OR REPRODUCTION REQUIRES THE WRITTEN CONSENT OF THE L.D. ALFA CO.

INNOVATIONS
CREATIVITY MEET. EVOLUTIONARY DESIGN

TOLERANCES (EXCEPT AS NOTED)			
DECIMAL	ANGULAR	FRACTIONAL	SCALE
NONE ±.031	± 1/2°	± 1/32	FULL
.X ±.015	DATE	DRAWN BY	CHECKED BY
.XX ±.010	25/06/019	SSL	X
.XXX ±.005			X

TITLE		REV.
1LT WALL MOUNT		
PART NO.	WALL	
ITEM NO.	425-1W	REV 2