One_m Pressure Balance Valve Trim & Pressure Balance Valve Trim with Diverter

FEATURES

- Solid brass construction for durability and reliability
- Pressure-balancing technology maintains water temperature within +/-3 degrees Fahrenheit
- High-temperature limit stop helps eliminate scalding
- Complements the One collection

CODES/STANDARDS APPLICABLE


Specified model meets or exceeds the following:


- ASME A112.18.1/CSA B125.1
- ADA (lever handle only)
- IAPMO/cUPC


P24415


P24416

ADA

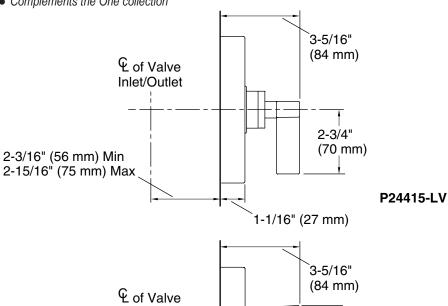



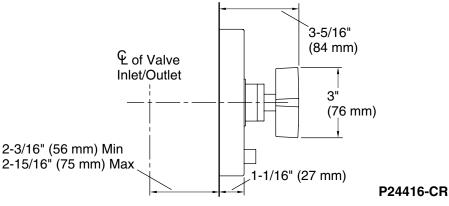



SPECIFIED MODEL			
Model	Description	Finishes	
P24415-CR	One Pressure Balance Valve Trim, Cross Handle	☐ CP Polished Chrome	☐ AD Nickel Silver ☐ AG Brushed Nickel
		☐ GN Gunmetal	☐ ULB Unlacquered Brass
P24415-LV	One Pressure Balance Valve Trim, Lever Handle	☐ CP Polished Chrome	☐ AD Nickel Silver ☐ AG Brushed Nickel
		☐ GN Gunmetal	☐ ULB Unlacquered Brass
P24416-CR	One Pressure Balance Valve Trim with Diverter, Cross Handle	☐ CP Polished Chrome	☐ AD Nickel Silver
		☐ AG Brushed Nickel	☐ GN Gunmetal
P24416-LV	One Pressure Balance Valve Trim with Diverter, Lever Handle	☐ CP Polished Chrome	☐ AD Nickel Silver
		☐ AG Brushed Nickel	☐ GN Gunmetal
Required Rough-In (1 required)			
P19310-00	Pressure Balance Rough-in for P24415		□ NA
P19310-WS	Pressure Balance Rough-in with Stops for P24415		□ NA
P19310-US	Rough-In with Stops and PEX connections for P24415		□ NA
P29306-WS	Pressure Balance High-Flow Rough-in for P24415		□ NA
P29500-00	Pressure Balance Rough-in & Thermostatic Cartridge for P24415		□ NA
P29500-WS	Pressure Balance Rough-in & Thermostatic Cartridge with Stops for P24415		□ NA
P29305-00	Pressure Balance with Diverter Rough-in for P24416		□ NA
P29305-WS	Pressure Balance with Diverter Rough-in with Stops for P24416		□ NA

We reserve the right to make revisions without notice in the design of products or in packaging unless this right has specifically been waived at the time the order is accepted.