LIVEX*

ASSEMBLING & INSTALLATION INSTRUCTIONS

The drawing shown may not exactly match the product enclosed. However, the installation instructions do apply to this product.

1903 1904

- **♦ WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**
- ◆ ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.


MOUNTING THE FIXTURE (Fig.1)

- 1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box.
- 2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
- 3. Attach the mounting plate to the junction box using two junction box screws as shown. The side of the single bar marked "GND" must face out. The junction box is not included.
- 4. Guide fixture wires through hole in center of mounting plate.
- 5. Follow wiring instructions carefully (see fig.2).
- 6. Install the light bulbs(Not included) in accordance with the fixture's specifications. NOTE: DO NOT EXCEED THE MAXIMUM WATTAGE RATING!
- 7. Insert the glass shade (A) to the ring of fixture body (B). Attach the small square shim plate to the other end of fixture body(B), then lock it securely with the screw.
- 8. Place the fixture body (B) over the mounting plate, aligning the backplane holes with the mounting screws, then lock it securely with the ball nuts(C).
- 9. This lamp can be vertically installed, however, the square tube of the lamp body has a hook at one end must be down. Follow wiring instructions carefully.

CONNECTING THE WIRES (Fig.2)

- 1. Connect the electrical wires as follows. Connect the Black wire from the fixture to the black house (hot) Wire. Connect the white wire from the fixture to the white (neutral) house wire. Make sure all wire nuts are secured. You may wrap the connections with electrical tape. If your outlet box has a ground wires (green or bare copper) connect fixture's ground wire to it. Otherwise attach the bare copper fixture wire to the green ground screw on the mounting plate.
- 2. Tuck the wire connections neatly into the wall junction box.

Your installation is now complete. Return power to the junction box and test the fixture.

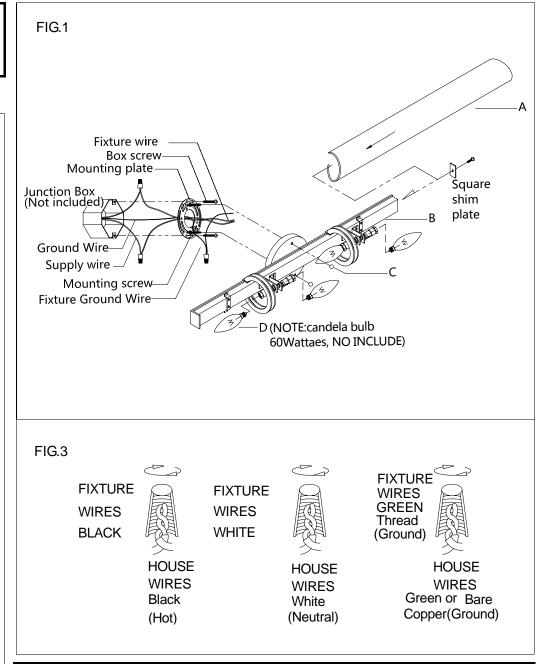

Thank you for purchasing a LIVEX product.

Need assistance with parts or assembly? Please call customer service at: **800-761-8056**Or visit us online at: WWW.LIVEXLIGHTING.COM