



ASSEMBLING & INSTALLATION INSTRUCTIONS

The drawing shown may not exactly match the product enclosed. However, the installation instructions do apply to this product.

49733 49736

- ◆ **WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**
- ◆ **ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.**

ASSEMBLING THE FIXTURE (Fig.1).

1. Shut off the power at the circuit breaker and remove old fixture from ceiling, including the old crossbar.
2. Carefully unpack the new fixture and lay all the parts on a clear surface.
3. Holding the tube(L) with the both end of coupling(K) to the top small sphere of the fixture body(M) and the bottom of big sphere(J), using the coupling(K) tighten them until snug.
4. Slide fixture wires through center tube (G,H,I). Connecting center part (G,H,I) to the pipe thread of big sphere(J), turn it clockwise until firmly tightened. Slide collar ring(F) over the tube, then do the same with the canopy (D).
5. Connecting swivel (E) to the tube (G) and turn it clockwise until firmly tightened, connecting pipe thread(B) to the swivel (E) and turn it clockwise until firmly tightened.
6. Attach the single bar(A) to the junction box using screws (C) as shown. The side of the single bar marked "GND" must face out. **The junction box is not included.**
7. Install the light bulbs(Not included) in accordance with the fixture specifications. **NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!**

CONNECTING THE WIRES (Fig.2)

1. Take the black wire from the ceiling junction box and the smooth wire leg from the fixture and twist bare ends together. Twist wire connector onto end of wire until snug.
2. Repeat same process with white junction box wire and ribbed wire leg of fixture wire. **NOTE:** Twist wires together in the same direction you twist the wire connector onto wires.
3. If your junction box has a grounding wire (green or bare copper), attach this wire and the bare copper wire from the fixture together as **step 1**. If junction box has no ground wire, attach the bare copper fixture wire to the green ground screw on the single bar
4. Tuck these wire connections neatly into the ceiling junction box and then raise the canopy (D) all the way to the ceiling, lock it securely with the ring(F) until tight.

Your installation is now complete. Return power to the junction box and test the fixture.

FIG.1


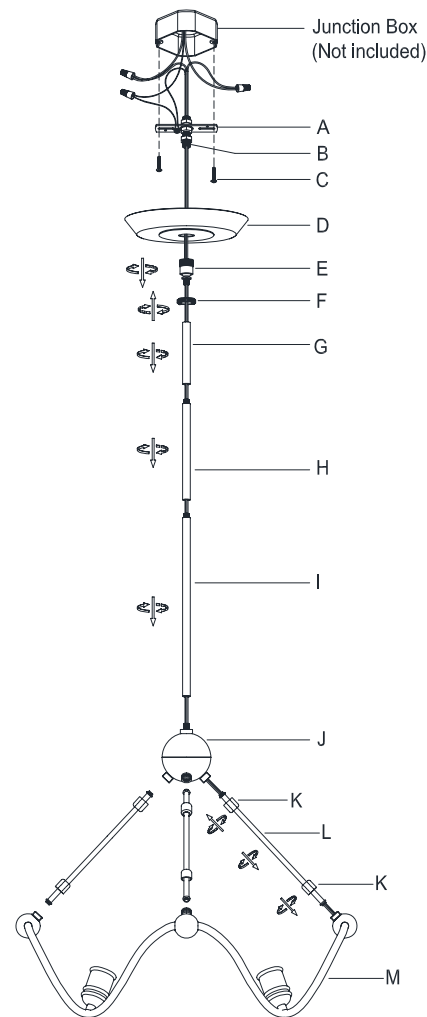


FIG.2

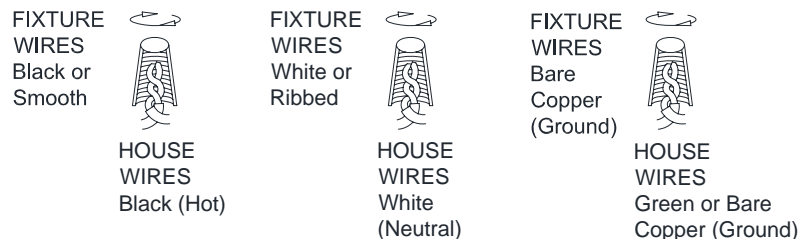

Thank you for purchasing a **LIVEX** product.
 Need assistance with parts or assembly? Please call customer service at: **800-761-8056**
 Or visit us on-line at: WWW.LIVEXLIGHTING.COM