

INSTALLATION INSTRUCTIONS FOR 345

For Wall Mount Fixture

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .

MOUNTING THE FIXTURE (Fig.1)

1. Shut off power at the fuse box or circuit breaker box. If necessary, remove old fixture and all mounting hardware from wall junction box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Attach the crossbar to the junction box with the two junction box screws as shown. The side of the crossbar marked "GND" must face out.
4. Thread the nipple part way into the center hole of the crossbar.
5. Connect the wires as described under "Connecting the Wires".
6. Place the fixture canopy over the nipple so the nipple protrudes through the center hole. Holding the fixture in place, thread the cap nut onto the end of the nipple until fixture is secured to the wall.

CONNECTING THE WIRES (Fig.2)

7. Connect the fixture wires to the junction box wires as shown in the Fig. 2. Make sure all wire connectors are secured and do not easily pull off with a slight tug. If there is no green ground wire from the junction box, connect the fixture ground wire to the crossbar with the green screw provided.

COMPLETING THE INSTALLATION (Fig.1)

8. Install the light bulbs in accordance with the fixture's specification: **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
9. Insert the plastic sheet into the glass frame to protect the glass from scratch.
10. With the wider end on upper side, Slide the glass shade into the decorative glass holder (A).
11. Pull out the plastic sheet carefully.

Your installation is now complete. Return power to the junction box and test the fixture.

Fig.1


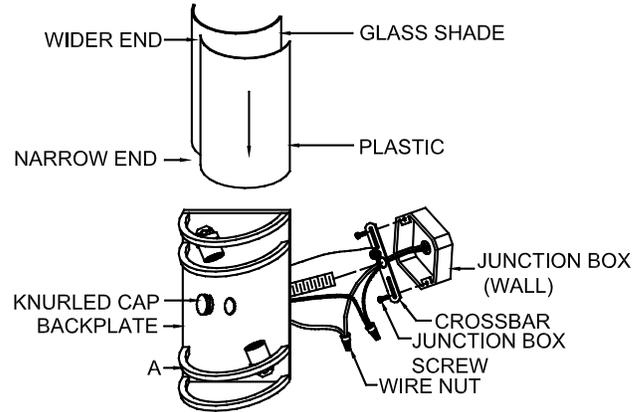


Fig .2

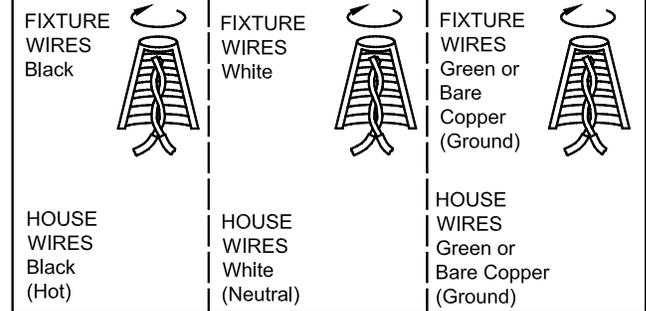

american
lighting
association

MIN 90°C SUPPLY CONDUCTORS