GENERATION LIGHTING

Wall

GENERAL PRODUCT INFORMATION:


These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for wet locations.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

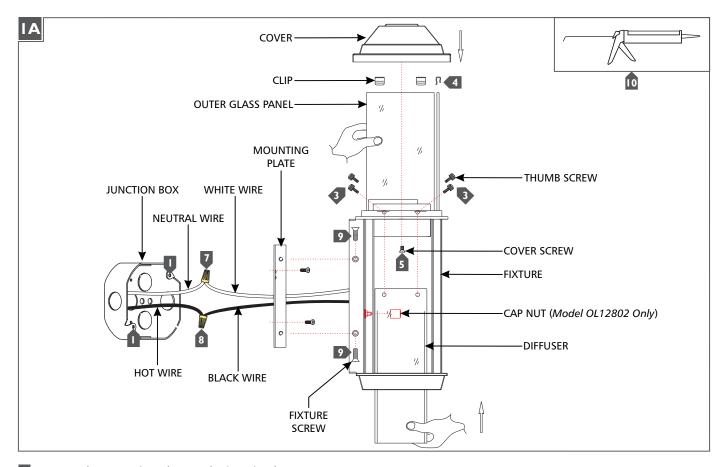

- Secure the mounting plate to the junction box.
- **2** For Model OL12802 Only: Screw the cap nut onto the fixture backplate.
- Install the diffuser by sliding it into the fixture from the bottom and secure with thumb screws.
- Install the outer glass panels by sliding them into the fixture from the top and secure them in place with the clips.
- Place the cover onto the fixture and secure it using the cover screws.
- 6 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 7 Connect the white wire to the neutral power line wire with a wire nut.
- 8 Connect the black wire to the hot power line wire with a wire nut.
- Neatly place the wires and wire nut connections into the junction box, mount the fixture base onto the mounting plate, and secure it with the fixtures screws.
- For wet locations, caulk around the base of the fixture with waterproof construction sealant.

SAVETHESE INSTRUCTIONS!

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077 800.969.3347

www.generationlighting.com

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.