

The Ash outdoor wall sconce is a modern take on the classic industrial-style light fixture. The Ash features a sleek metal shade and clear diffuser that creates a column of diffused light from under the shade. Ash wall sconces feature energy-efficient, fully dimmable integrated LED lighting. Available in four sizes (8", 10", 12", 16") and two finishes: Bronze and Charcoal.

Outstanding protection against the elements:

- Marine-grade powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized acrylic lensing
- IP-65 Rated

SPECIFICATIONS

| | |
|-----------------------|---|
| DELIVERED LUMENS | 515 or 1189 with clear cylinder 300 or 613 with clear lens |
| WATTS | 8 or 18 |
| VOLTAGE | Universal 120-277V, with integral transient 2.5kV surge protection (driver) |
| DIMMING | 0-10, ELV |
| LIGHT DISTRIBUTION | Symmetric |
| MOUNTING OPTIONS | Wall |
| PERFORMANCE OPTIONS | Photocontrol / Surge Protector |
| CCT | 2700K or 3000K |
| CRI | 90+ |
| COLOR BINNING | 3 Step |
| BUG RATING | B1-U1-G0 |
| DARK SKY | Compliant (Lensed version only) |
| WET LISTED | IP65 |
| GENERAL LISTING | ETL |
| CALIFORNIA TITLE 24 | Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required. |
| START TEMP | -30°C |
| FIELD SERVICEABLE LED | Yes |
| CONSTRUCTION | Aluminum |
| HARDWARE | Stainless Steel |
| FINISH | Marine Grade Powder Coat |
| LED LIFETIME | L70; 70,000 Hours |
| WARRANTY* | 5 Years |
| WEIGHT | 3.5 lbs. |

* Visit techlighting.com for specific warranty limitations and details.



ASH 8
shown in bronze/clear lens




ASH 8
shown in charcoal/clear cylinder

ORDERING INFORMATION

| 7000WASH | CRI / CCT | LENGTH | LENS | FINISH | VOLTAGE | OPTIONS |
|----------|-----------------------------|--------|------------------|------------|-------------------------|---|
| L927 | LED LO-OUTPUT 90 CRI, 2700K | 8 8" | C CLEAR CYLINDER | Z BRONZE | UNV 120V-277V UNIVERSAL | NONE |
| H927 | LED HI-OUTPUT 90 CRI, 2700K | | D CLEAR LENS | H CHARCOAL | | PC BUTTON PHOTOCONTROL |
| L930 | LED LO-OUTPUT 90 CRI, 3000K | | | | | SP SURGE PROTECTION |
| H930 | LED HI-OUTPUT 90 CRI, 3000K | | | | | PCSP BUTTON PHOTOCONTROL & SURGE PROTECTION |

ASH 8 WALL SCONCE

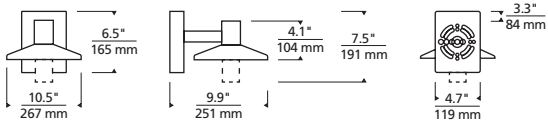


Ash 8

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

ASH 8 WITH CLEAR CYLINDER

- Total Lumen Output: 1189
- Total Power: 18
- Luminaire Efficacy: 66
- Color Temp: 3000K
- CRI: 90
- BUG Rating: B1-U1-G0

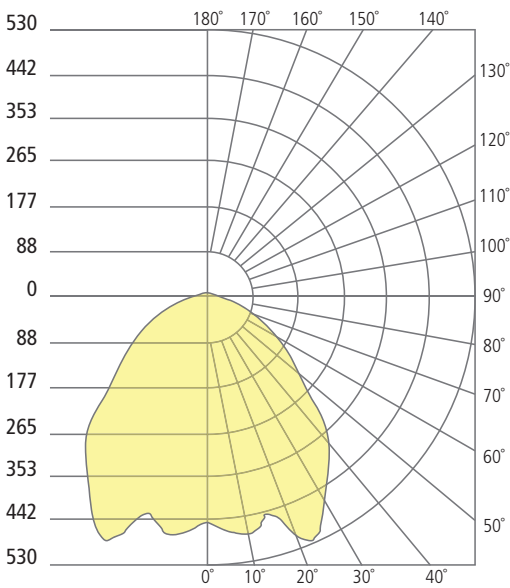

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES



2019 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark. Tech Lighting reserves the right to change specifications for product improvements without notification.



VISUAL COMFORT GROUP

7400 Linder Avenue, Skokie, Illinois 60077

T 847.410.4400 F 847.410.4500