ASSEMBLY INSTRUCTIONS

Junction box — A — B — H — C — R — D — E — F — R — G
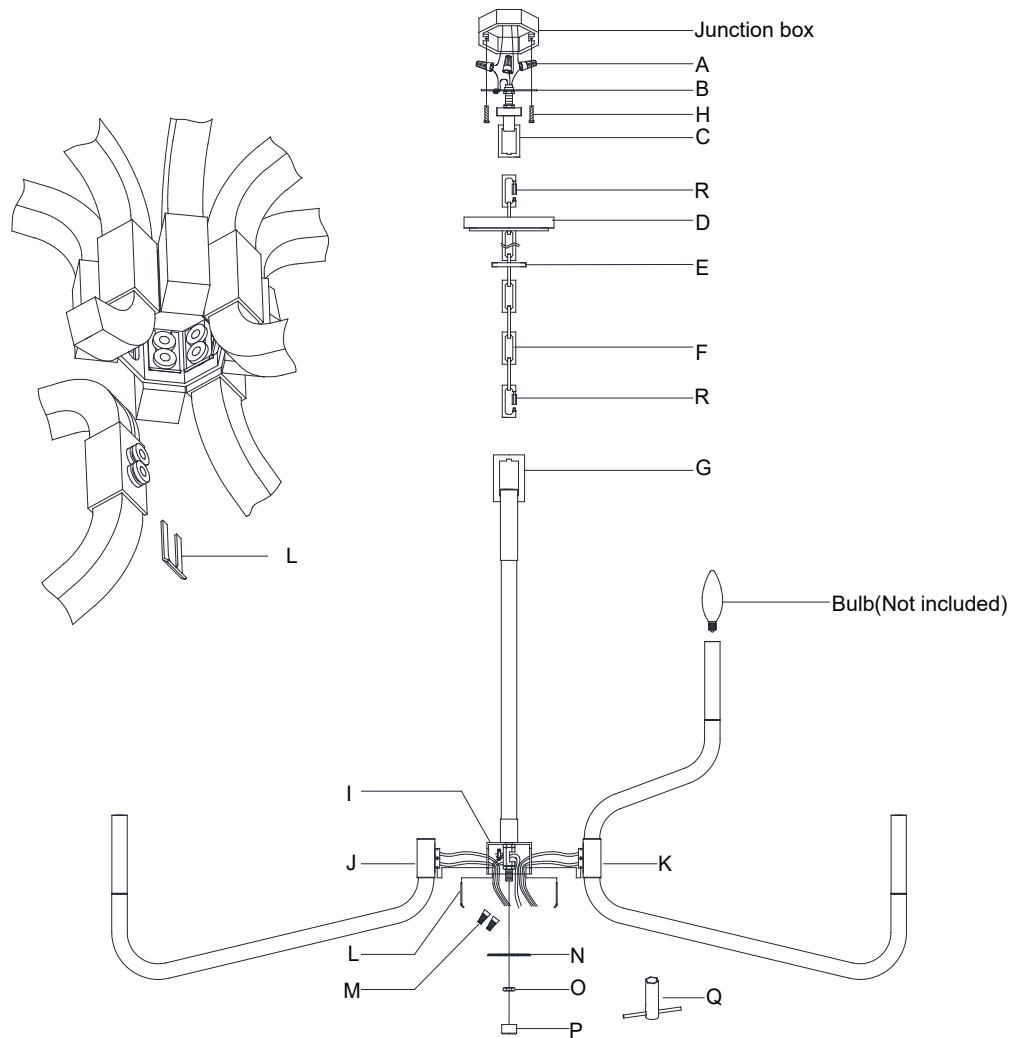
L

Bulb(Not included)

I — J — K — L — M — N — O — P — Q

Reagan Grande Two Tier Chandelier
Item # CHC 5904

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**
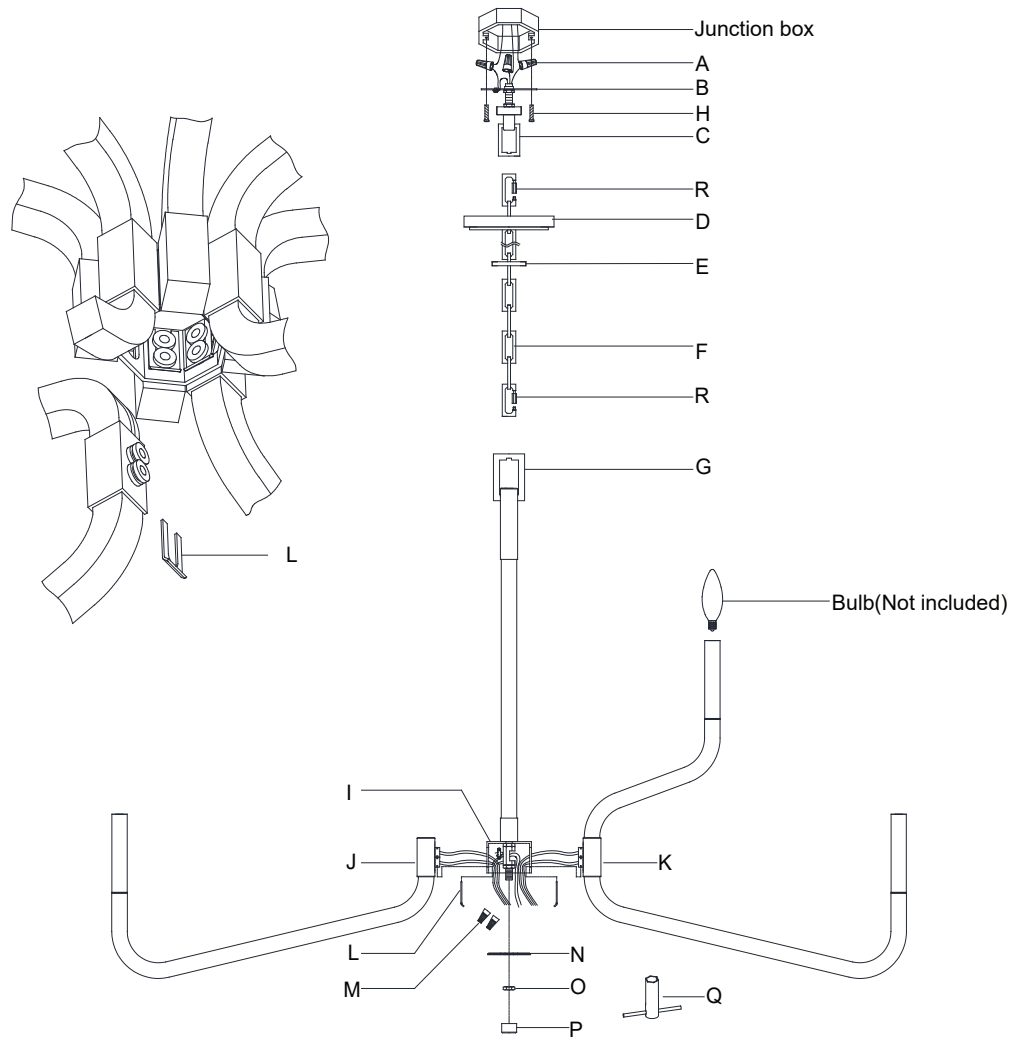
INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

1.   Carefully remove all parts from the box.
2.   Remove the collar loop (C) from the chain (F) by unscrewing the quick link (R).
3.   Install the mounting plate (B) and collar loop (C) to the junction box with mounting screws (H) provided. Using a wrench (not provided) secure the mounting plate (B) and collar loop (C) to the threaded nipple using provided hex nuts.
4.   Install the canopy (D) to collar loop (C) and secure with collar ring (E). If needed, adjust canopy (D) height by loosening hex nuts and screwing collar loop (C) up or down then re-secure.
5.   With the fixture desired height, shorten the chain (F) as needed using the chain pliers (not included).
6.   Open the chain quick link (R), then attach the chain quick link (R) to the collar loop (C). Secure the chain quick link (R).
7.   Open the chain quick link (R) from the opposite side then attach to the fixture loop (G). Secure the chain quick link (R).
8.   Remove the final (P) from the fixture body (I).
9.   Remove the cap (N) from the fixture body (I) by unscrewing the nut (O) using the wrench (Q).
10. Attach the fixture arm to the fixture body (I) and secure with the spring clips (L).
11. Connect the arm ribbed wire (no markings) to the fixture ribbed wire (no markings) with wire nut (M) and wrap the connection with the electrical tape (not included).
12. Connect the arm smooth wire (with markings) to the fixture smooth wire (with markings) with wire nut (M) and wrap the connection with the electrical tape (not included).
13. Attached the cap (N) to the fixture body (I) and secure with the nut (O) using the wrench (Q) provided.
14. Install the final (P) to the fixture body (I).

VISUAL COMFORT

ASSEMBLY INSTRUCTIONS

Junction box

A
B
H
C
R
D
E
F
R
G

L

Bulb(Not included)

I
J
K
L — N
M — O
Q
P

Reagan Grande Two Tier Chandelier
Item # CHC 5904

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A
LICENSED ELECTRICIAN.
WARNING***SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN
FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.
INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY
DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.
ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.
NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO
REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND
INSTALLATION ARE FINAL.**

---

15.   Weave the fixture wires through the chain (F).

16.   When you reach the canopy (D) and collar loop (C), measure the wires then cut, be certain
to leave enough length to connect the wires in the junction box.

17.   Strip the insulation on the fixture wires about 5/8".

18.   Loosen the collar ring (E) and let the canopy (D) slip down the chain (F) carefully.

19.   Connect the fixture ground wire to the ground wire in the junction box using the wire nut (A).
IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.

20.   Connect the fixture ribbed wire (no markings) to the neutral wire in the junction box using
the wire nut (A).

21.   Connect the fixture smooth wire (with markings) to the hot wire in the junction box using
the wire nut (A).
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL
BE COMPROMISED.

22.   Carefully tuck the wire connections into the junction box.

23.   Install the canopy (D) to the junction box and secure with the collar ring (E).

24.   Insert bulbs (not included) into the sockets.

25.   Installation is complete, turn on power at fuse or circuit breaker.

***Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents..

VISUAL COMFORT