


CUBE ARCHITECTURAL DC-WS05

LED Wall Mounts

WAC LIGHTING

Responsible Lighting®

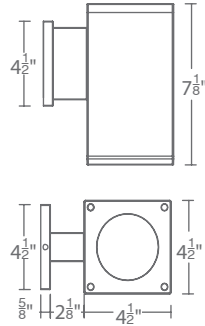

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cubical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

FEATURES

- High performance exterior rated LED wall mount light
- Fixture can install upside down to alter light distribution
- Solid aluminum construction
- 5 year warranty

ORDERING NUMBER

SPECIFICATIONS

Input: Universal voltage 120V - 277VAC, 50/60Hz
Dimming: Electronic low voltage (ELV) : 100% - 5% (120V only)
 0-10V: 100% - 1% (120-277V)
Light Source: High output 3 Step Mac Adam Ellipse COB
 Rated life of 60,000 hours at L70
Finish: Electrostatically powder coated, white, black, bronze and graphite
Standards: IP65 rated, UL & cUL wet location listed, Energy Star® 2.0 rated (labeled with *)
Operating Temp: -13°F to 122°F (-25°C to 50°C)

Diameter	Watt	Beam	Beam Angle	Color Temp	CRI	Lumen	CBCP	Efficacy (lm/w)	Light Distribution	Finish	
DC-WS05	5" 27W	S Straight up or down	18°	927S*	2700K	90	1680	8526	62		BK Black WT White BZ Bronze GH Graphite
				827S*	2700K	85	1800	9151	67		
				930S*	3000K	90	1700	8639	63		
				830S8	3000K	85	1995	10126	74		
				835S*	3500K	85	2190	11118	81		
				840S*	4000K	85	2260	11483	84		
		N Straight up or down	25°	927S*	2700K	90	1730	5513	64		
				827S*	2700K	85	1855	5918	69		
				930S*	3000K	90	1750	5587	65		
				830S*	3000K	85	2055	6548	76		
				835S*	3500K	85	2255	7190	84		
		F Straight up or down	33°	927S*	2700K	90	1725	4246	64		
				827S*	2700K	85	1850	4557	69		
				930S*	3000K	90	1745	4302	65		
				830S*	3000K	85	2045	5043	76		
				835S*	3500K	85	2245	5537	83		
		F Away from the wall	N/A	927A*	2700K	90	1815		67		
				827A*	2700K	85	1950		72		
				930A*	3000K	90	1840	N/A	68		
				830A*	3000K	85	2155		80		
835A*	3500K			85	2370		88				
F Towards the wall	N/A	927B*	2700K	90	1815		67				
		827B*	2700K	85	1950		72				
		930B*	3000K	90	1840	N/A	68				
		830B*	3000K	85	2155		80				
		835B*	3500K	85	2370		88				

DC-WS05-_____ - _____

Example: DC-WS05-F930A-WT

wacighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122


Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

CUBE ARCHITECTURAL DC-WS06

LED Wall Mounts

WAC LIGHTING

Responsible Lighting®

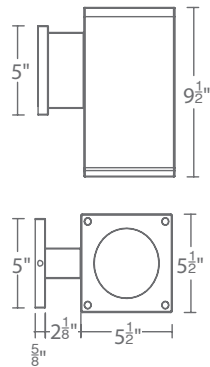

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cubical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

FEATURES

- High performance exterior rated LED wall mount light
- Fixture can install upside down to alter light distribution
- Solid aluminum construction
- 5 year warranty

ORDERING NUMBER

SPECIFICATIONS

- Input:** Universal voltage 120V - 277VAC, 50/60Hz
- Dimming:** Electronic low voltage (ELV) : 100% - 5% (120V only)
0-10V: 100% - 1% (120-277V)
- Light Source:** High output 3 Step Mac Adam Ellipse COB
Rated life of 70,000 hours at L70
- Finish:** Electrostatically powder coated, white, black, bronze and graphite
- Standards:** IP65 rated, UL & cUL wet location listed, Energy Star® 2.0 rated (labeled with *)
- Operating Temp:** -13°F to 122°F (-25°C to 50°C)

Diameter	Watt	Beam	Beam Angle	Color Temp	CRI	Lumen	CBCP	Efficacy (lm/w)	Light Distribution	Finish	
DC-WS06	6" 36W	S Straight up or down	19°	927S*	2700K	90	1875	8911	52		BK Black WT White BZ Bronze GH Graphite
				827S*	2700K	85	2400	11392	67		
				930S*	3000K	90	2000	9500	56		
				830S*	3000K	85	2170	10317	60		
				835S*	3500K	85	2500	11884	69		
				840S*	4000K	85	2450	11639	68		
		N Straight up or down	30°	927S*	2700K	90	1830	4642	51		
				827S*	2700K	85	2340	5935	65		
				930S*	3000K	90	1950	4949	54		
				830S*	3000K	85	2120	5374	59		
				835S*	3500K	85	2440	6191	68		
				840S*	4000K	85	2390	6063	66		
		F Straight up or down	40°	927S*	2700K	90	1840	3310	51		
				827S*	2700K	85	2355	4231	65		
				930S*	3000K	90	1965	3528	55		
				830S*	3000K	85	2130	3832	59		
				835S*	3500K	85	2455	4414	68		
				840S*	4000K	85	2405	4323	67		
		F Away from the wall	N/A	927A*	2700K	90	2225		62		
				827A*	2700K	85	2840		79		
				930A*	3000K	90	2370	N/A	66		
				830A*	3000K	85	2575		72		
				835A*	3500K	85	2965		82		
				840A*	4000K	85	2905		81		
F Towards the wall	N/A	927B*	2700K	90	2225		62				
		827B*	2700K	85	2840		79				
		930B*	3000K	90	2370	N/A	66				
		830B*	3000K	85	2575		72				
		835B*	3500K	85	2965		82				
		840B*	4000K	85	2905		81				

DC-WS06-_____ - _____

Example: DC-WS06-F930A-WT

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122


Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

CUBE ARCHITECTURAL DC-WD05

LED Wall Mounts

WAC LIGHTING

Responsible Lighting®

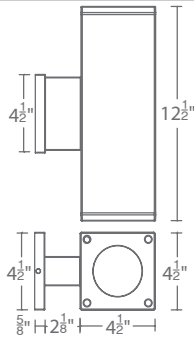

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cubical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

FEATURES

- High performance exterior rated LED wall mount light
- Fixture can install upside down to alter light distribution
- Solid aluminum construction
- 5 year warranty

SPECIFICATIONS

Input: Universal voltage 120V - 277VAC, 50/60Hz
Dimming: Electronic low voltage (ELV) : 100% - 5% (120V only)
 0-10V: 100% - 1% (120-277V)
Light Source: High output 3 Step Mac Adam Ellipse COB
 Rated life of 60,000 hours at L70
Finish: Electrostatically powder coated, white, black, bronze and graphite
Standards: IP65 rated, UL & cUL wet location listed
Operating Temp: -13°F to 122°F (-25°C to 50°C)

ORDERING NUMBER

Diameter	Watt	Beam Angle	Color Temp	CRI	Lumen	CBCP	Efficacy (lm/w)	Light Distribution	Finish		
DC-WD05	5" 27Wx2	S Straight up and down	18°	827S	2700K	85	1680 x 2	8526 x 2	62 x 2		BK Black WT White BZ Bronze GH Graphite
			927S	2700K	90	1800 x 2	9151 x 2	67 x 2			
			830S	3000K	85	1700 x 2	8639 x 2	63 x 2			
			930S	3000K	90	1995 x 2	10126 x 2	74 x 2			
			835S	3500K	85	2190 x 2	11118 x 2	81 x 2			
			840S	4000K	85	2260 x 2	11483 x 2	84 x 2			
		N Straight up and down	25°	827S	2700K	85	1730 x 2	5513 x 2	64 x 2		
			927S	2700K	90	1855 x 2	5918 x 2	69 x 2			
			830S	3000K	85	1750 x 2	5587 x 2	65 x 2			
			930S	3000K	90	2055 x 2	6548 x 2	76 x 2			
			835S	3500K	85	2255 x 2	7190 x 2	84 x 2			
			840S	4000K	85	2330 x 2	7426 x 2	86 x 2			
		F Straight up and down	33°	827S	2700K	85	1725 x 2	4246 x 2	64 x 2		
			927S	2700K	90	1850 x 2	4557 x 2	69 x 2			
			830S	3000K	85	1745 x 2	4302 x 2	65 x 2			
			930S	3000K	90	2045 x 2	5043 x 2	76 x 2			
			835S	3500K	85	2245 x 2	5537 x 2	83 x 2			
			840S	4000K	85	2320 x 2	5719 x 2	86 x 2			
		F Away from the wall	N/A	827A	2700K	85	1815 x 2	N/A	67 x 2		
			927A	2700K	90	1950 x 2	72 x 2				
			830A	3000K	85	1840 x 2	68 x 2				
			930A	3000K	90	2155 x 2	80 x 2				
			835A	3500K	85	2370 x 2	88 x 2				
			840A	4000K	85	2445 x 2	91 x 2				
F Towards the wall	N/A	827B	2700K	85	1815 x 2	N/A	67 x 2				
	927B	2700K	90	1950 x 2	72 x 2						
	830B	3000K	85	1840 x 2	68 x 2						
	930B	3000K	90	2155 x 2	80 x 2						
	835B	3500K	85	2370 x 2	88 x 2						
	840B	4000K	85	2445 x 2	91 x 2						
F One side each	N/A	827C	2700K	85	1815 x 2	N/A	67 x 2				
	927C	2700K	90	1950 x 2	72 x 2						
	830C	3000K	85	1840 x 2	68 x 2						
	930C	3000K	90	2155 x 2	80 x 2						
	835C	3500K	85	2370 x 2	88 x 2						
	840C	4000K	85	2445 x 2	91 x 2						

DC-WD05-_____ - _____ Example: DC-WD05-F930A-WT

wacighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters/Eastern Distribution Center
 44 Harbor Park Drive
 Port Washington, NY 11050

Central Distribution Center
 1600 Distribution Ct
 Lithia Springs, GA 30122



Western Distribution Center
 1750 Archibald Avenue
 Ontario, CA 91760

CUBE ARCHITECTURAL DC-WD06

LED Wall Mounts

WAC LIGHTING

Responsible Lighting®



Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cubical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

FEATURES

- High performance exterior rated LED wall mount light
- Fixture can install upside down to alter light distribution
- Solid aluminum construction
- 5 year warranty

ORDERING NUMBER

SPECIFICATIONS

Input:	Universal voltage 120V - 277VAC, 50/60Hz
Dimming:	Electronic low voltage (ELV) : 100% - 5% (120V only) 0-10V: 100% - 1% (120-277V)
Light Source:	High output 3 Step Mac Adam Ellipse COB Rated life of 70,000 hours at L70
Finish:	Electrostatically powder coated, white, black, bronze and graphite
Standards:	IP65 rated, UL & cUL wet location listed
Operating Temp:	-13°F to 122°F (-25°C to 50°C)

Diameter	Watt	Beam	Beam Angle	Color Temp	CRI	Lumen	CBCP	Efficacy (lm/w)	Light Distribution	Finish	
DC-WD06	6" 36W x 2	S Straight up and down	19°	827S	2700K	85	1875 x 2	8911	52 x 2		BK Black WT White BZ Bronze GH Graphite
				927S	2700K	90	2400 x 2	11392	67 x 2		
				830S	3000K	85	2000 x 2	9500	56 x 2		
				930S	3000K	90	2170 x 2	10317	60 x 2		
				835S	3500K	85	2500 x 2	11884	69 x 2		
				840S	4000K	85	2450 x 2	11639	68 x 2		
		N Straight up and down	30°	827S	2700K	85	1830 x 2	4642	51 x 2		
				927S	2700K	90	2340 x 2	5935	65 x 2		
				830S	3000K	85	1950 x 2	4949	54 x 2		
				930S	3000K	90	2120 x 2	5374	59 x 2		
				835S	3500K	85	2440 x 2	6191	68 x 2		
				840S	4000K	85	2390 x 2	6063	66 x 2		
		F Straight up and down	40°	827S	2700K	85	1840 x 2	3310	51 x 2		
				927S	2700K	90	2355 x 2	4231	65 x 2		
				830S	3000K	85	1965 x 2	3528	55 x 2		
				930S	3000K	90	2130 x 2	3832	59 x 2		
				835S	3500K	85	2455 x 2	4414	68 x 2		
				840S	4000K	85	2405 x 2	4323	67 x 2		
		F Away from the wall	N/A	827A	2700K	85	2225 x 2		62 x 2		
				927A	2700K	90	2840 x 2	N/A	79 x 2		
				830A	3000K	85	2370 x 2	N/A	66 x 2		
				930A	3000K	90	2575 x 2	N/A	72 x 2		
				835A	3500K	85	2965 x 2	N/A	82 x 2		
				840A	4000K	85	2905 x 2	N/A	81 x 2		
F Towards the wall	N/A	827B	2700K	85	2225 x 2		62 x 2				
		927B	2700K	90	2840 x 2	N/A	79 x 2				
		830B	3000K	85	2370 x 2	N/A	66 x 2				
		930B	3000K	90	2575 x 2	N/A	72 x 2				
		835B	3500K	85	2965 x 2	N/A	82 x 2				
		840B	4000K	85	2905 x 2	N/A	81 x 2				
F One side each	N/A	827C	2700K	85	2225 x 2		62 x 2	One side away from wall, one side towards the wall			
		927C	2700K	90	2840 x 2	N/A	79 x 2				
		830C	3000K	85	2370 x 2	N/A	66 x 2				
		930C	3000K	90	2575 x 2	N/A	72 x 2				
		835C	3500K	85	2965 x 2	N/A	82 x 2				
		840C	4000K	85	2905 x 2	N/A	81 x 2				

DC-WD06-_____ - _____ Example: DC-WD06-F930A-WT

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760