


# TUBE ARCHITECTURAL DS-PD05

## LED Pendant Mounts

# WAC LIGHTING

Responsible Lighting®

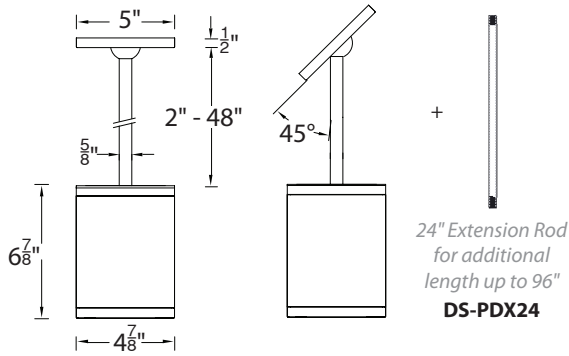

Seismic swivel tilts up to 45° to accommodate sloped ceiling

Fixture Type:

Catalog Number:

Project:

Location:

### PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cylindrical profile delivers accent lighting. Comes in various light beam angle options.

### FEATURES

- High performance exterior rated LED pendant
- Includes 45° swivel canopy and 2 field cuttable 24" rods
- Solid aluminum construction
- 39° visual cutoff angle for glare control
- 5 year warranty

### SPECIFICATIONS

- Input:** Universal voltage 120V - 277VAC, 50/60Hz
- Dimming:** Electronic low voltage (ELV) : 100% - 5% (120V only)  
0-10V: 100% - 1% (120-277V)
- Light Source:** High output 3 Step Mac Adam Ellipse COB  
Rated life of 60,000 hours at L70
- Finish:** Electrostatically powder coated, white, black, bronze and graphite
- Standards:** IP65 rated, ETL & cETL wet location listed, Energy Star® 2.0 rated (labeled with \*)
- Operating Temp:** -13°F to 122°F (-25°C to 50°C)

### ORDERING NUMBER

Diameter	Watt	Beam	Beam Angle	Color Temp	CRI	Lumen	CBCP	Efficacy (Lm/W)	Light Distribution	Finish
DS-PD05	5" 27W	S Spot	18°	927 2700K	90	1680	8526	62		<b>BK</b> Black <b>WT</b> White <b>BZ</b> Bronze <b>GH</b> Graphite
				27* 2700K	85	1800	9151	67		
				930 3000K	90	1700	8639	63		
				30* 3000K	85	1995	10126	74		
				35* 3500K	85	2190	11118	81		
				40* 4000K	85	2260	11483	84		
		N Narrow	25°	927 2700K	90	1730	5513	64		
				27* 2700K	85	1855	5918	69		
				930 3000K	90	1750	5587	65		
				30* 3000K	85	2055	6548	76		
				35* 3500K	85	2255	7190	84		
				40* 4000K	85	2330	7426	86		
		F Flood	33°	927 2700K	90	1725	4246	64		
				27* 2700K	85	1850	4557	69		
				930 3000K	90	1745	4302	65		
				30* 3000K	85	2045	5043	73		
				35* 3500K	85	2245	5537	83		
				40* 4000K	85	2320	5719	86		

DS-PD05-\_\_\_\_\_ - \_\_\_\_\_

Example: DS-PD05-S930-WT

wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760



# TUBE ARCHITECTURAL DS-PD05

## LED Pendant Mounts

# WAC LIGHTING

Responsible Lighting®

### MOUNTING ACCESSORIES

	<i>Extension Rod</i>	<b>DS-PDX24</b>	<i>One 24" extension rod for DS-PDSK Can be field cut</i>	<b>Finish</b>	
				<b>BK</b> <i>Black</i>	
				<b>WT</b> <i>White</i>	
				<b>BZ</b> <i>Bronze</i>	
				<b>GH</b> <i>Graphite</i>	

Example: **DS-PDX24-WT**

**wacighting.com**  
Phone (800) 526.2588  
Fax (800) 526.2585

**Headquarters/Eastern Distribution Center**  
44 Harbor Park Drive  
Port Washington, NY 11050

**Central Distribution Center**  
1600 Distribution Ct  
Lithia Springs, GA 30122


**Western Distribution Center**  
1750 Archibald Avenue  
Ontario, CA 91760

# TUBE ARCHITECTURAL DS-PD06

## LED Pendant Mounts

# WAC LIGHTING

Responsible Lighting®

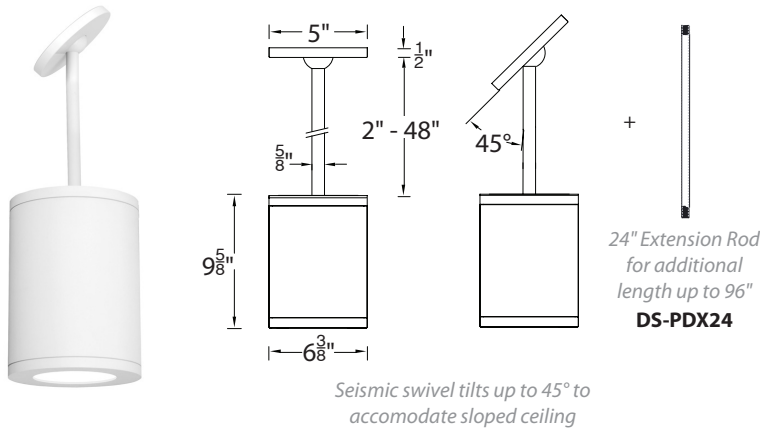

Seismic swivel tilts up to 45° to accommodate sloped ceiling

Fixture Type:

Catalog Number:

Project:

Location:

### PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cylindrical profile delivers accent lighting. Comes in various light beam angle options.

### FEATURES

- High performance exterior rated LED pendant
- Includes 45° swivel canopy and 2 field cuttable 24" rods
- Solid aluminum construction
- 38° visual cutoff angle for glare control
- 5 year warranty

### SPECIFICATIONS

<b>Input:</b>	Universal voltage 120V - 277VAC, 50/60Hz
<b>Dimming:</b>	Electronic low voltage (ELV) : 100% - 5% (120V only) 0-10V: 100% - 1% (120-277V)
<b>Light Source:</b>	High output 3 Step Mac Adam Ellipse COB Rated life of 70,000 hours at L70
<b>Finish:</b>	Electrostatically powder coated, white, black, bronze and graphite
<b>Standards:</b>	IP65 rated, ETL & cETL wet location listed, Energy Star® 2.0 rated (labeled with *)
<b>Operating Temp:</b>	-13°F to 122°F (-25°C to 50°C)

### ORDERING NUMBER

Diameter	Watt	Beam	Beam Angle	Color Temp	CRI	Lumen	CBCP	Efficacy (Lm/W)	Light Distribution	Finish	
DS-PD06	6" 36W	S Spot	16°	927	2700K	90	2420	15955	69		<b>BK</b> Black <b>WT</b> White <b>BZ</b> Bronze <b>GH</b> Graphite
				27*	2700K	85	3105	20455	89		
				930	3000K	90	2572	16977	74		
				30*	3000K	85	3195	21068	91		
				35*	3500K	85	3350	22091	96		
				40*	4000K	85	3385	22296	97		
		N Narrow	29°	927	2700K	90	2385	6872	68		
				27*	2700K	85	3055	8694	87		
				930	3000K	90	2535	7216	72		
				30*	3000K	85	3150	8955	90		
				35*	3500K	85	3300	9390	94		
				40*	4000K	85	3330	9477	95		
		F Flood	37°	927	2700K	90	2385	4859	68		
				27*	2700K	85	3060	6229	87		
				930	3000K	90	2540	5170	73		
				30*	3000K	85	3150	6416	90		
				35*	3500K	85	3305	6727	94		
				40*	4000K	85	3335	6790	95		

DS-PD06-\_\_\_\_\_-\_\_\_\_\_-

Example: DS-PD06-S930-WT

wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760

# TUBE ARCHITECTURAL DS-PD06

LED Pendant Mounts

# WAC LIGHTING

Responsible Lighting®

## MOUNTING ACCESSORIES

	<i>Extension Rod</i>	<b>DS-PDX24</b>	<i>One 24" extension rod for DS-PDSK Can be field cut</i>	<b>Finish</b>	
				<b>BK</b> <i>Black</i>	
				<b>WT</b> <i>White</i>	
				<b>BZ</b> <i>Bronze</i>	
				<b>GH</b> <i>Graphite</i>	

Example: **DS-PDX24-WT**

**wacighting.com**  
Phone (800) 526.2588  
Fax (800) 526.2585

**Headquarters/Eastern Distribution Center**  
44 Harbor Park Drive  
Port Washington, NY 11050

**Central Distribution Center**  
1600 Distribution Ct  
Lithia Springs, GA 30122


**Western Distribution Center**  
1750 Archibald Avenue  
Ontario, CA 91760

# TUBE ARCHITECTURAL DS-PD08

## LED Pendant Mounts

# WAC LIGHTING

Responsible Lighting®

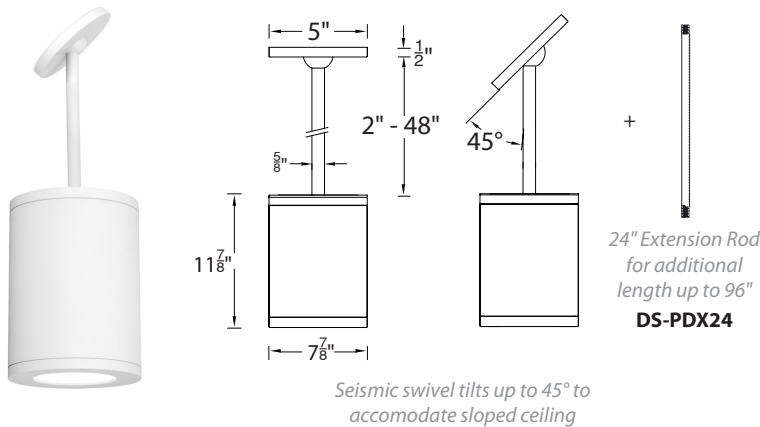

Fixture Type:

Catalog Number:

Project:

Location:

### SPECIFICATIONS

<b>Input:</b>	Universal voltage 120V - 277VAC, 50/60Hz
<b>Dimming:</b>	Electronic low voltage (ELV) : 100% - 5% (120V only) 0-10V: 100% - 1% (120-277V)
<b>Light Source:</b>	High output 3 Step Mac Adam Ellipse COB Rated life of 80,000 hours at L70
<b>Finish:</b>	Electrostatically powder coated, white, black, bronze and graphite
<b>Standards:</b>	IP65 rated, ETL & cETL wet location listed, Energy Star® 2.0 rated (labeled with *)
<b>Operating Temp:</b>	-13°F to 122°F (-25°C to 50°C)

### PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cylindrical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

### FEATURES

- High performance exterior rated LED pendant
- Includes 45° swivel canopy and 2 field cuttable 24" rods
- Solid aluminum construction
- 43° visual cutoff angle for glare control
- 5 year warranty

### ORDERING NUMBER

Diameter	Watt	Beam	Beam Angle	Color Temp	CRI	Lumen	CBCP	Efficacy (Lm/W)	Light Distribution	Finish	
DS-PD08	8" 48W	S Spot	18°	927	2700K	90	3075	11830	64		<b>BK</b> Black <b>WT</b> White <b>BZ</b> Bronze <b>GH</b> Graphite
				27*	2700K	85	3540	13616	74		
				930	3000K	90	2975	11443	62		
				30*	3000K	85	3615	13904	75		
				35*	3500K	85	3855	14822	80		
				40*	4000K	85	3915	15054	82		
		N Narrow	21°	927	2700K	90	3075	16383	64		
				27*	2700K	85	3540	18857	74		
				930	3000K	90	2975	15847	62		
				30*	3000K	85	3615	19255	75		
				35*	3500K	85	3855	20526	80		
				40*	4000K	85	3915	20847	82		
		F Flood	34°	927	2700K	90	3035	6200	63		
				27*	2700K	85	3495	7136	73		
				930	3000K	90	2935	5997	61		
				30*	3000K	85	3570	7287	74		
				35*	3500K	85	3805	7768	79		
				40*	4000K	85	3865	7890	81		

DS-PD08-\_\_\_\_\_-\_\_\_\_\_-\_\_\_\_\_-

Example: DS-PD08-S930-WT

wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760



# TUBE ARCHITECTURAL DS-PD08

LED Pendant Mounts

# WAC LIGHTING

Responsible Lighting®

## MOUNTING ACCESSORIES

	<i>Extension Rod</i>	<b>DS-PDX24</b>	<i>One 24" extension rod for DS-PDSK Can be field cut</i>	<b>Finish</b>	
				<b>BK</b> <i>Black</i>	
				<b>WT</b> <i>White</i>	
				<b>BZ</b> <i>Bronze</i>	
				<b>GH</b> <i>Graphite</i>	

Example: **DS-PDX24-WT**

waclighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760